


# 28mm Pipe Inspection Camera System



Premier developer, manufacturer and distributor of high frequency and magnetic locators, PVC pipe detectors, PE Pipe, metallic pipe, cable and custom specialty locators.

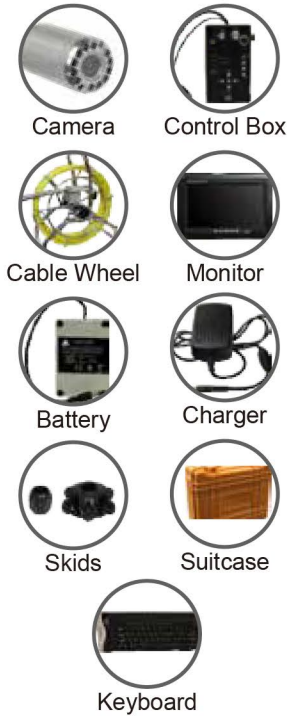

Camera Head	
Camera Size:	ø28mmX268mm
Spring length:	ø22.3mmX160mm
Transmitter:	512Hz
Sensor size:	1/4 inch
View angle:	120°
Work current/supply:	100MA / DC12V
Camera light:	12PCS white LEDS
Resolution:	PAL: 720X576 NTSC: 720X480
Glass material:	Sapphire glass
Shell material:	Stainless steel
Cable Wheel	
Cable size:	460(L)X270(W)X560(H)
Wire material:	Fiberglass rod
Wire length:	60m(Max 80m)
Wire diameter:	ø7.0mm
Wheel material:	Stainless steel
Meter counter & handle-brake	
Fiberglass color:	Yellow
Wheel size:	L88XW39XH62mm

Monitor	
Size:	7inch digital color
Total Pixels:	1440X234
Work current/supply:	250MA / DC12V
OSD language:	English
Image reversible	
Model:	16:9&4:3
Sunshade	
Li-ion Battery	
Total Power:	14W
Charge time:	5hours
Protective voltage:	8.1V
Work time:	≥260minutes
Suitcase	
size:	L460XW370XH180mm
Material:	Engineering plastics
Charger	
Input:	AC100-240V~50/60Hz
Output:	DC 12V/1000MA
DC plug diameter:	2.1mm

Control Box	
Power supply:	12V
Work current:	200MA
Storage medium:	8G SD card(max 32G) SD card reader
Battery level display	
Picture snap & movie record	
DVR Total Pixels:	720X576 (D1)
Movie format:	AVI
Microphone Audio record	
Stereo earphone output	
Keyboard	
Size:	220X118X18mm
Language:	English
Interface:	USB
Text Edit Line:	PAL 27letter 14line NTSC 27letter 12line
Max Edit Page:	4pages
Skids	
Skid -1	ø40mm
Skid -2	ø90mm