


23mm Pipe Inspection Camera System

Effective through December 31, 2017



Premier developer, manufacturer and distributor of high frequency and magnetic locators, PVC pipe detectors, PE Pipe, metallic pipe, cable and custom specialty locators.

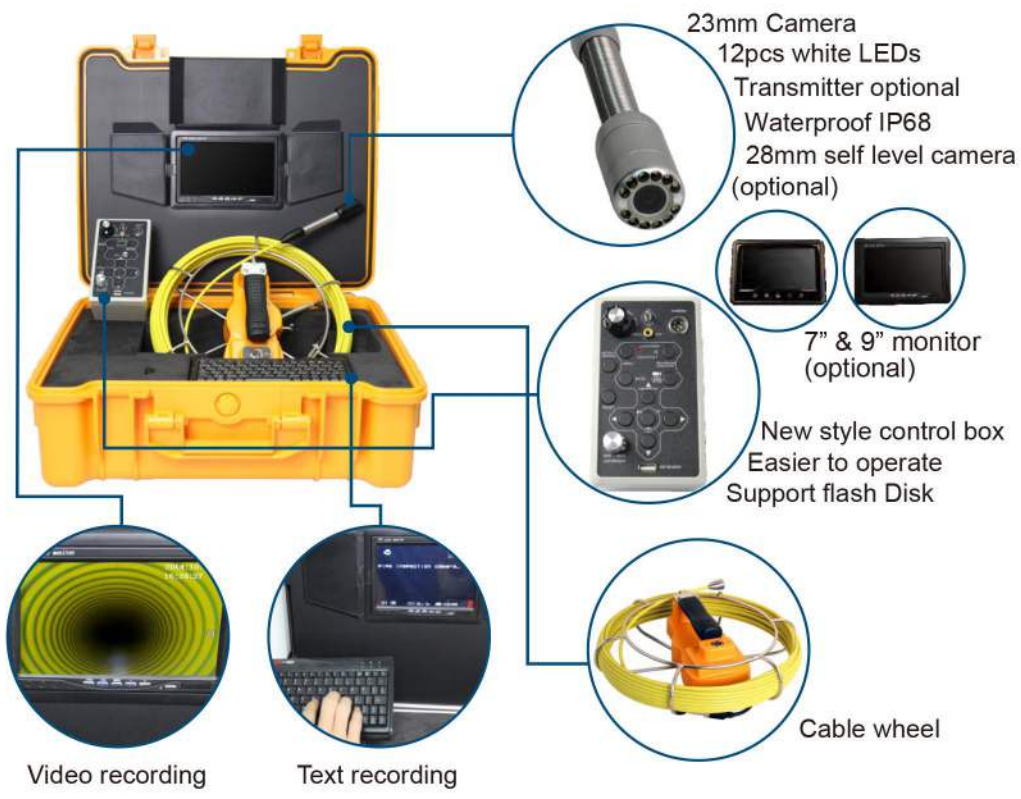

Camera Head	
Camera Size:	ø23mmX125mm
Sensor size:	1/4 inch
View angle:	120°
Work current/power:	100MA / DC12V
Camera light:	12PCS white LEDS
Resolution:	PAL: 720X576 NTSC: 720X480
Glass material:	Sapphire glass
Shell material:	stainless steel
Cable Wheel	
Cable size:	ø320mmX105(h)
Wire material:	Fiberglass rod
Wire length:	20m(max 50m)
Wire diameter:	ø5.0mm
Skid	
Skid	ø40/80mm

Monitor	
Size:	7inch digital color
Total Pixels:	800X480
Work current/supply:	250MA / DC12V
OSD language:	English
Image reversible	
Model:	16:9&4:3
Sunshade	
Li-ion Battery	
Total Power:	7W
Charge time:	3hours
Protective voltage:	8.1V
Work time:	≥240minutes
Suitcase	
Size:	L520XW435XH200mm
Material:	Engineering plastics

Control Box	
Power supply:	12V
Work current:	150MA
Storage medium:	8G SD card(max 32G) /SD card reader/U flash Disk
Battery level display	
Picture snap & movie record	
DVR Total Pixels:	720X576 (D1)
Movie format:	AVI
Microphone Audio record	
Stereo earphone output	
Charger	
Input:	AC100-240V~50/60Hz
Output:	DC 12V/1000MA
DC plug diameter:	2.1mm
Keyboard	
Size:	220(L)X118(W)X18(H)mm